


# ComfortFit Bell Shaped Uncorded Earplugs

## Product description


Maxisafe Bell Shaped earplug is ergonomically designed and characterised to have a very high sound absorption levels, making it suitable for use in very loud environments.

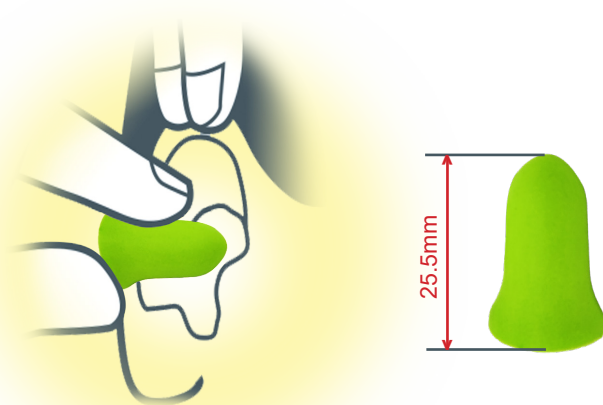

## Features and Benefits

- Bell Shaped fit for excellent attenuation
- Contoured shape for easy insertion
- Brightly coloured for easy identification
- Excellent attenuation
- Smooth polyurethane foam skin for better hygiene
- Certified to Class 5, SLC<sub>80</sub> 26dB
- AS/NZS 1270:2002 compliant

## Fitting Instructions

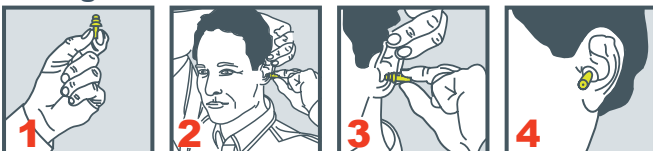

1. Hold the stem of the earplug firmly behind the largest flange.
2. Reach over your head with the opposite hand and pull the top of your ear to open the ear canal. While you are still holding the ear open, push the smallest flange of the plug.
3. For best noise reduction insert plugs as deeply as possible.
4. The reusable earplug properly positioned in the ear canal.

## Care / Usage - Disposable Earplugs

**Inspect:** Prior to fitting, examine earplugs for dirt, damage or hardness discard immediately if compromised.

**Discard:** Discard disposable earplugs after each use.

**Hygiene:** To maintain hygiene standards, disposable earplugs should be discarded at the end of every shift.

HEU652



## Standards & Certification

- Certified to AS/NZS 1270:2002



BSI Certified Product  
AS/NZS 1270:2002  
Lic. BMP 747636

## Packaging

Pack: 1 Pair  
Pack Qty: 200 Uncorded Pairs  
Carton Qty: 10 Boxes



## Applications

- Agriculture & Forestry • Chemical • Construction
- Manufacturing • Metal Processing • Mining • Military
- Municipal Services • Transportation • Welding
- Woodworking

## Ordering Information

Product Code	Description
HEU652	ComfortFit Bell Shaped Uncorded Earplugs

# Maxisafe Ergo Push & Twist Earplugs

## Sound Attenuation Values

Hearing protector Class 5 tested to AS/NZS 1270. When selected, used and maintained as specified in AS/NZS 1269, this protector may be used in noise up to 105dB, assuming an 85dB criterion. A lower criterion may require a higher protector class.

Frequency (HZ)	125	250	500	1000	2000	4000	8000	Clamping Force	SLC <sub>80</sub>	Class
Mean (dB)	28.7	31.1	32.7	32	33.6	41.3	45.7	N/A	26	5
SD (dB)	6.3	6.7	6.6	6.4	6.4	5.1	5.3			
Mean-SD (dB)	22.4	24.4	26.1	25.6	29.1	36.2	40.4			

**Important Note:** SLC<sub>80</sub> rating could be different in your ears as each canal is different so it is hard to get accurate readings.

Noise	Class	Noise Levels
Sandblasting / Jack Hammers	<b>5</b>	105 to less than 110
Chainsaws / Fire Pumps	<b>4</b>	100 to less than 105
Lawnmowers/Grinders	<b>3</b>	95 to less than 100
Inside Truck	<b>2</b>	90 to less than 95
Engine Room	<b>1</b>	less than 90

Determination of Class:					
Class	1	2	3	4	5
SLC <sub>80</sub> dB	10-13	14-17	18-21	22-25	26 or greater

**WARNING :** The reported attenuation of the Maxisafe ear plugs will only be obtained if it is in good condition and is fitted as directed. Reference should be made to AS/NZS: 1270:2002 to ensure the correct selection and use of protector.

Common noise sources and their typical sound levels


Typical sound level in db	Sound source
140	Jet engine at 30m (pain can be felt at this threshold)
130	Rivet hammer (pain can be felt at this threshold)
120	Rock drill
110	Chain saw Angle grinding
100	Sheet-metal workshop
90	Lawn-mower
85	Front-end loader Listening to a personal music player in a quiet room
80	Kerbside heavy traffic Lathe Welding
70	Loud conversation
60	Normal conversation
40	Quiet radio music
30	Whispering
20	Quiet urban room
10	Rustling leaves
0	Hearing threshold

Taken from Compliance Code Noise - Edition 2

## Understanding Noise and Sound Levels WORK SCALE

Safe Zone:  
**0-85db**

Protection Required:  
**From 85db**

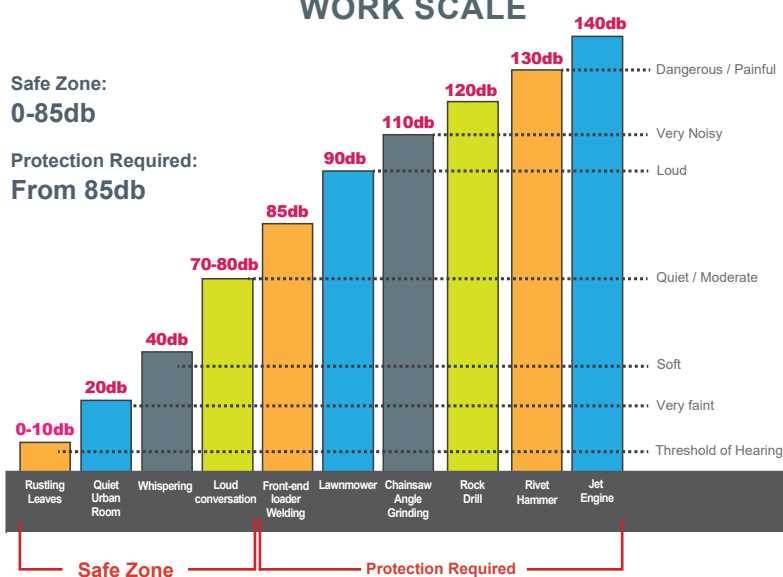

Noise is considered **Health Hazard #4** according to Worksafe Victoria  
<https://www.worksafe.vic.gov.au/noise>

For more details download a copy of Compliance Code Noise Edition 2, 2019 (Part 3 -Duties of Employers)  
<https://www.worksafe.vic.gov.au/resources/compliance-code-noise>